

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 16 TOWNSHIP 16 RANGE 2

DATE: 10-20-08

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Survey mark nail set over

METHOD OF ESTABLISHMENT: County: stone
9-12-07


IN. S.P.C. E ZONE NAD '83

NAME: 16021617

N: 508856.0420(m)

E: 43841.3470(m)

NOTE: This corner position
represents a title corner
and may not necessarily
be in the position of the
Record corner.

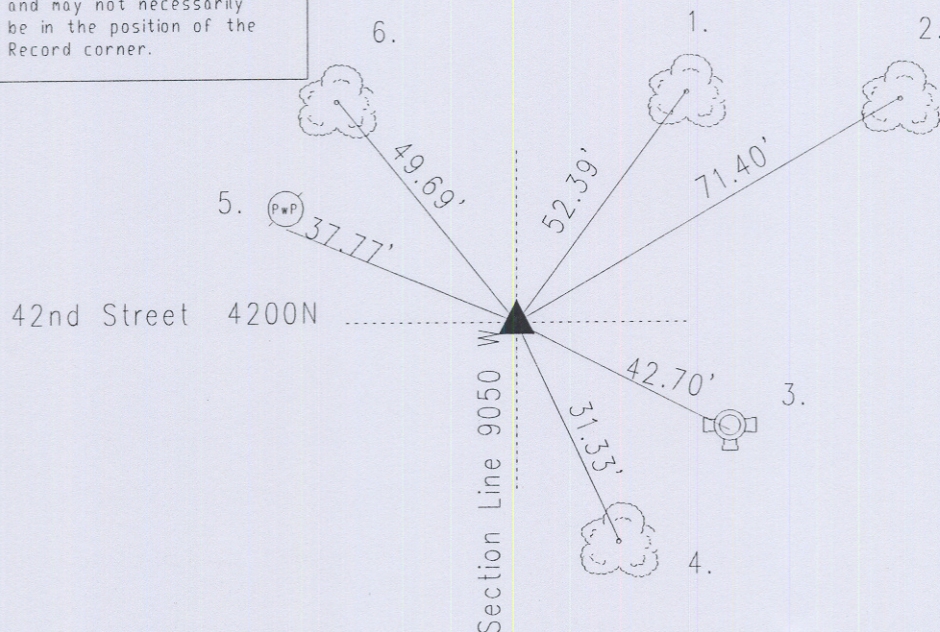

Note: County ties dated 4-8-76 stone found. County ties dated 10-19-59 and Pike Township Legal Survey Book pg. 9. Calls 1" square bolt found 5" down. and was 0.12' W aand 0.05' S of the high point of the stone. Re-tied 4-15-02 by wilcoxon. Re-tied 9-12-07 by Wilcoxon. Re-tied 10-20-08 by Wilcoxon.

16021617

REF.	DISTANCE	DESCRIPTION
1.	52.39'	Railroad spike W 20" sugar maple 12"up
2.	71.40'	Railroad spike SF sugar maple 12"up
3.	42.70'	Top nut of fire hydrant
4.	31.33'	Railroad psike NF 18" locust 12"up
5.	37.77'	Road nail SW PwP no# 8"up
6.	49.69'	Railroad spike W 36" sugar maple 24"up